
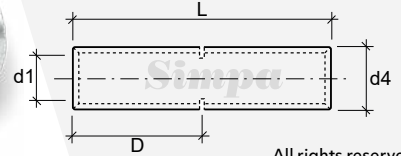


SEM-A

STANDARD TYPE BUTT CONNECTORS

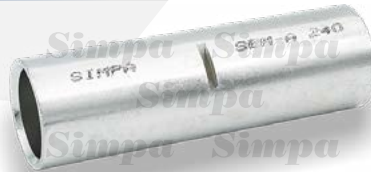

All rights reserved.

Order Code	Cable Section (mm ²)	Dimensions				Box Pcs.	Box Weight	Parcel Pcs.	Box Weight
		d1	d4	L	D				
SEM-A/001,5	1,5	1,8	3,4	20,0	10,0	1.000	~1,1 kg.	8.000	~8,8 kg.
SEM-A/002,5	2,5	2,4	4,0	20,0	10,0	1.000	~1,3 kg.	8.000	~10,4 kg.
SEM-A/004	4	3,1	4,8	20,0	10,0	800	~1,4 kg.	6.400	~11,2 kg.
SEM-A/006	6	4,0	5,5	25,0	12,5	800	~2,1 kg.	6.400	~16,8 kg.
SEM-A/010	10	4,5	6,0	30,0	15,0	600	~2,1 kg.	4.800	~16,8 kg.
SEM-A/016	16	5,5	7,5	35,0	17,5	300	~2,0 kg.	2.400	~16,0 kg.
SEM-A/025	25	7,0	9,5	40,0	20,0	200	~2,4 kg.	1.600	~19,2 kg.
SEM-A/035	35	8,5	11,0	45,0	22,5	150	~2,2 kg.	1.200	~17,6 kg.
SEM-A/050	50	10,0	13,0	50,0	25,0	100	~2,4 kg.	1.000	~19,2 kg.
SEM-A/070	70	11,5	14,5	55,0	27,5	80	~2,4 kg.	640	~19,2 kg.
SEM-A/095	95	13,5	16,5	60,0	30,0	60	~2,3 kg.	480	~18,4 kg.
SEM-A/120	120	14,5	18,0	65,0	32,5	40	~2,1 kg.	320	~16,8 kg.
SEM-A/150	150	16,5	21,0	70,0	35,0	30	~2,6 kg.	240	~20,8 kg.
SEM-A/185	185	18,5	23,0	75,0	37,5	20	~2,0 kg.	160	~16,0 kg.
SEM-A/240	240	21,0	26,0	85,0	42,5	15	~2,1 kg.	120	~16,8 kg.
SEM-A/300	300	23,5	28,5	100,0	50,0	10	~1,9 kg.	80	~15,2 kg.
SEM-A/400	400	27,0	33,0	110,0	55,0	6	~1,5 kg.	48	~12,0 kg.
SEM-A/500	500	30,0	38,0	120,0	60,0	4	~1,7 kg.	32	~13,6 kg.
SEM-A/625	625	34,0	42,0	130,0	65,0	3	~1,7 kg.	24	~13,6 kg.

SEM-A SPECIFICATIONS

MATERIAL	ELECTROLYTIC COPPER CONFORMED TO EN 13800
COATING	TIN PLATED
JOINT	CLAMP COUPLING
THICKNESS	THICK

