


SKP-L90-D

DIN 46235 TYPE (D) 90° ANGULAR CABLE LUGS

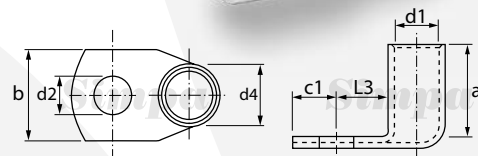

All rights reserved.

Order Code	Cable Section (mm ²)	Bolt	Dimensions							Box Pcs,	Box Weight	Parcel Pcs,	Box Weight
			d1	d4	a	d2	b	c1	L3				
SKP-L90-D/006-M05	6	M5	3,8	5,5	10,0	5,3	8,5	6,5	9,0	500	~1,4 kg,	3000	~8,4 kg,
SKP-L90-D/006-M06		M6	3,8	5,5	10,0	6,4	8,5	7,5	10,0	500	~1,6 kg,	3000	~9,6 kg,
SKP-L90-D/010-M05	10	M5	4,5	6,0	10,0	5,3	9,0	7,0	10,0	300	~1,0 kg,	1800	~6,0 kg,
SKP-L90-D/010-M06		M6	4,5	6,0	10,0	6,4	9,0	7,5	10,0	300	~1,1 kg,	1800	~6,6 kg,
SKP-L90-D/010-M08		M8	4,5	6,0	10,0	7,0	13,0	10,0	13,0	300	~1,1 kg,	1800	~6,6 kg,
SKP-L90-D/016-M06	16	M6	5,5	8,5	20,0	6,4	13,0	7,5	11,0	125	~1,5 kg,	750	~9,0 kg,
SKP-L90-D/016-M08		M8	5,5	8,5	20,0	8,4	13,0	10,0	13,0	125	~1,6 kg,	750	~9,6 kg,
SKP-L90-D/016-M10		M10	5,5	8,5	20,0	10,5	17,0	12,0	15,0	125	~1,8 kg,	750	~10,8 kg,
SKP-L90-D/016-M12		M12	5,5	8,5	20,0	13,0	18,0	13,0	18,0	125	~1,7 kg,	750	~10,2 kg,
SKP-L90-D/025-M06	25	M6	7,0	10,0	20,0	6,4	14,0	7,5	11,0	100	~1,5 kg,	600	~9,0 kg,
SKP-L90-D/025-M08		M8	7,0	10,0	20,0	8,4	16,0	10,0	13,0	100	~1,6 kg,	600	~9,6 kg,
SKP-L90-D/025-M10		M10	7,0	10,0	20,0	10,5	17,0	12,0	15,0	100	~1,6 kg,	600	~9,6 kg,
SKP-L90-D/025-M12		M12	7,0	10,0	20,0	13,0	19,0	13,0	18,0	100	~1,7 kg,	600	~10,2 kg,
SKP-L90-D/035-M06	35	M6	8,2	12,5	20,0	8,4	17,0	10,0	13,0	80	~2,2 kg,	480	~13,2 kg,
SKP-L90-D/035-M08		M8	8,2	12,5	20,0	10,5	19,0	12,0	15,0	80	~2,2 kg,	480	~13,2 kg,
SKP-L90-D/035-M10		M10	8,2	12,5	20,0	13,0	21,0	13,0	18,0	80	~2,3 kg,	480	~13,8 kg,
SKP-L90-D/035-M12		M12	8,2	12,5	20,0	15,0	21,0	14,5	20,0	80	~2,3 kg,	480	~13,8 kg,
SKP-L90-D/050-M08	50	M8	10,0	14,5	28,0	8,4	20,0	10,0	16,0	60	~2,6 kg,	360	~15,6 kg,
SKP-L90-D/050-M10		M10	10,0	14,5	28,0	10,5	22,0	12,0	16,0	60	~2,7 kg,	360	~16,2 kg,
SKP-L90-D/050-M12		M12	10,0	14,5	28,0	13,0	24,0	13,0	18,0	60	~2,7 kg,	360	~16,2 kg,
SKP-L90-D/050-M14		M14	10,0	14,5	28,0	15,0	24,0	14,5	20,0	60	~2,8 kg,	360	~16,8 kg,
SKP-L90-D/050-M16	M16	10,0	14,5	28,0	17,0	28,0	16,0	22,0	60	~2,8 kg,	360	~16,8 kg,	
SKP-L90-D/070-M08	70	M8	11,5	16,5	28,0	8,4	24,0	10,0	14,0	50	~3,0 kg,	300	~18,0 kg,
SKP-L90-D/070-M10		M10	11,5	16,5	28,0	10,5	24,0	12,0	16,0	50	~3,2 kg,	300	~19,2 kg,
SKP-L90-D/070-M12		M12	11,5	16,5	28,0	13,0	24,0	13,0	18,0	50	~3,2 kg,	300	~19,2 kg,
SKP-L90-D/070-M14		M14	11,5	16,5	28,0	15,0	24,0	14,5	20,0	50	~3,3 kg,	300	~19,8 kg,
SKP-L90-D/070-M16	M16	11,5	16,5	28,0	17,0	30,0	16,0	22,0	50	~3,3 kg,	300	~19,8 kg,	
SKP-L90-D/095-M10	95	M10	13,5	19,0	35,0	10,5	28,0	12,0	17,0	25	~2,3 kg,	150	~13,8 kg,
SKP-L90-D/095-M12		M12	13,5	19,0	35,0	13,0	28,0	13,0	18,0	25	~2,3 kg,	150	~13,8 kg,
SKP-L90-D/095-M14		M14	13,5	19,0	35,0	15,0	28,0	14,5	20,0	25	~2,3 kg,	150	~13,8 kg,
SKP-L90-D/095-M16		M16	13,5	19,0	35,0	17,0	32,0	16,0	22,0	25	~2,3 kg,	150	~13,8 kg,
SKP-L90-D/120-M10	120	M10	15,5	21,0	35,0	10,5	32,0	15,0	17,0	25	~2,6 kg,	150	~15,6 kg,
SKP-L90-D/120-M12		M12	15,5	21,0	35,0	13,0	32,0	16,0	18,0	25	~2,7 kg,	150	~16,2 kg,
SKP-L90-D/120-M14		M14	15,5	21,0	35,0	15,0	32,0	18,0	20,0	25	~2,7 kg,	150	~16,2 kg,
SKP-L90-D/120-M16		M16	15,5	21,0	35,0	17,0	32,0	19,0	22,0	25	~2,7 kg,	150	~16,2 kg,
SKP-L90-D/120-M20		M20	15,5	21,0	35,0	21,0	38,0	21,0	24,0	25	~2,8 kg,	150	~16,8 kg,
SKP-L90-D/150-M10	150	M10	17,0	23,5	35,0	10,5	34,0	15,0	17,0	15	~2,1 kg,	90	~12,6 kg,
SKP-L90-D/150-M12		M12	17,0	23,5	35,0	13,0	34,0	16,0	18,0	15	~2,1 kg,	90	~12,6 kg,
SKP-L90-D/150-M14		M14	17,0	23,5	35,0	15,0	34,0	19,0	20,0	15	~2,3 kg,	90	~13,8 kg,
SKP-L90-D/150-M16		M16	17,0	23,5	35,0	17,0	34,0	19,0	22,0	15	~2,3 kg,	90	~13,8 kg,
SKP-L90-D/150-M20		M20	17,0	23,5	35,0	21,0	40,0	21,0	24,0	15	~2,4 kg,	90	~14,4 kg,

Order Code	Cable Section (mm ²)	Bolt	Dimensions							Box Pcs	Box Weight	Parcel Pcs	Box Weight
			d1	d4	a	d2	b	c1	L3				
SKP-L90-D/185-M10	185	M10	19,0	25,5	40,0	10,5	37,0	15,0	22,0	15	~2,8 kg.	90	~16,8 kg.
SKP-L90-D/185-M12		M12	19,0	25,5	40,0	13,0	37,0	16,0	22,0	15	~2,8 kg.	90	~16,8 kg.
SKP-L90-D/185-M14		M14	19,0	25,5	40,0	15,0	37,0	19,0	22,0	15	~2,9 kg.	90	~17,4 kg.
SKP-L90-D/185-M16		M16	19,0	25,5	40,0	17,0	37,0	19,0	22,0	15	~2,9 kg.	90	~17,4 kg.
SKP-L90-D/185-M20		M20	19,0	25,5	40,0	21,0	40,0	21,0	24,0	15	~2,8 kg.	90	~16,8 kg.
SKP-L90-D/240-M12	240	M12	21,5	29,0	40,0	13,0	42,0	16,0	22,0	8	~2,0 kg.	48	~12,0 kg.
SKP-L90-D/240-M14		M14	21,5	29,0	40,0	15,0	42,0	19,0	22,0	8	~2,1 kg.	48	~12,6 kg.
SKP-L90-D/240-M16		M16	21,5	29,0	40,0	17,0	42,0	19,0	22,0	8	~2,0 kg.	48	~12,0 kg.
SKP-L90-D/240-M20		M20	21,5	29,0	40,0	21,0	45,0	21,0	24,0	8	~2,0 kg.	48	~12,0 kg.

SKP-L90-D SPECIFICATIONS

MATERIAL	ELECTROLYTIC COPPER CONFORMED TO EN 13600
COATING	TIN PLATED
JOINT	CLAMP COUPLING
THICKNESS	VERY THICK
CABLE ENTRY	LONG
TUBE DIMENSIONS ACCORDING TO DIN 46235	

