


SKP-S1

EUROPE TYPE TUBULAR CABLE LUGS

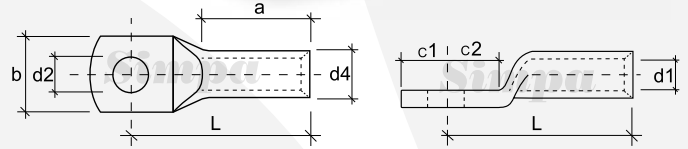

All rights reserved.

Order Code	Cable Section (mm ²)	Bolt	Dimensions								Box Pcs.	Box Weight	Parcel Pcs.	Box Weight
			d1	d4	a	d2	b	c1	c2	L				
SKP-S1/002.5-M04	2.5	M4	2.3	4.2	6.0	4.3	7.5	4.0	5.0	13.0	1.000	~1.2 kg.	6.000	~7.2 kg.
SKP-S1/002.5-M05/SD		M5	2.3	4.2	6.0	5.3	8.5	4.75	5.5	14.0	1.000	~1.3 kg.	6.000	~7.8 kg.
SKP-S1/002.5-M06		M6	2.3	4.2	6.0	6.5	9.5	6.5	6.5	16.0	1.000	~1.5 kg.	6.000	~9.0 kg.
SKP-S1/004-M05/SD	4	M5	3.0	5.0	8.0	5.3	9.0	4.75	6.0	18.0	700	~1.6 kg.	4.200	~9.6 kg.
SKP-S1/004-M06		M6	3.0	5.0	8.0	6.5	10.0	6.5	6.5	19.0	700	~1.8 kg.	4.200	~10.8 kg.
SKP-S1/004-M08		M8	3.0	5.0	8.0	8.5	13.0	8.5	9.5	22.0	700	~2.2 kg.	4.200	~15.4 kg.
SKP-S1/006-M06/SD	6	M6	3.5	6.5	9.0	6.5	12.0	6.5	7.5	21.0	500	~2.4 kg.	3.000	~14.4 kg.
SKP-S1/006-M08		M8	3.5	6.5	9.0	8.5	15.0	10.0	10.0	23.0	500	~2.8 kg.	3.000	~16.8 kg.
SKP-S1/006-M10		M10	3.5	6.5	9.0	10.5	17.0	12.0	12.0	25.0	500	~3.0 kg.	3.000	~18.0 kg.
SKP-S1/006-M12		M12	3.5	6.5	9.0	13.0	19.0	13.0	13.0	28.0	400	~2.8 kg.	3.000	~16.8 kg.
SKP-S1/010-M05	10	M5	4.5	7.0	10.0	5.5	12.0	6.5	7.5	22.0	500	~2.1 kg.	3.000	~12.6 kg.
SKP-S1/010-M06/SD		M6	4.5	7.0	10.0	6.5	12.0	6.2	7.5	22.0	500	~2.1 kg.	3.000	~12.6 kg.
SKP-S1/010-M08		M8	4.5	7.5	10.0	8.5	15.0	10.0	10.0	25.0	400	~2.4 kg.	2.400	~14.4 kg.
SKP-S1/010-M10		M10	4.5	7.5	10.0	10.5	17.0	12.0	12.0	27.0	400	~2.6 kg.	2.400	~15.6 kg.
SKP-S1/010-M12		M12	4.5	7.5	10.0	13.0	19.0	13.0	13.0	29.0	300	~2.0 kg.	1.800	~12.0 kg.
SKP-S1/016-M05	16	M5	5.5	8.5	13.0	5.5	12.0	5.5	6.5	26.0	400	~2.2 kg.	2.400	~13.2 kg.
SKP-S1/016-M06		M6	5.5	8.5	13.0	6.5	12.0	6.2	7.5	27.0	400	~3.4 kg.	2.400	~20.4 kg.
SKP-S1/016-M08/SD		M8	5.5	8.5	13.0	8.4	15.0	8.5	9.5	29.0	300	~2.8 kg.	1.800	~16.8 kg.
SKP-S1/016-M10		M10	5.5	8.5	13.0	10.5	17.0	10.5	11.5	31.0	300	~3.0 kg.	1.800	~18.0 kg.
SKP-S1/016-M12		M12	5.5	8.5	13.0	13.0	19.0	13.0	13.0	33.0	250	~2.6 kg.	1.500	~15.6 kg.
SKP-S1/025-M05	25	M5	7.0	10.0	15.0	5.5	14.0	7.5	7.5	30.0	200	~2.5 kg.	1.200	~15.0 kg.
SKP-S1/025-M06		M6	7.0	10.0	15.0	6.5	14.0	7.5	7.5	30.0	200	~2.4 kg.	1.200	~14.4 kg.
SKP-S1/025-M08/SD		M8	7.0	10.0	15.0	8.4	16.0	10.0	10.0	32.0	200	~2.7 kg.	1.200	~16.2 kg.
SKP-S1/025-M10		M10	7.0	10.0	15.0	10.5	18.0	12.0	12.0	34.0	200	~2.8 kg.	1.200	~16.8 kg.
SKP-S1/025-M12		M12	7.0	10.0	15.0	13.0	19.0	13.0	13.0	35.0	200	~2.8 kg.	1.200	~16.8 kg.
SKP-S1/035-M06	35	M6	8.5	12.0	17.0	6.5	17.0	7.5	7.5	32.0	125	~2.3 kg.	750	~13.8 kg.
SKP-S1/035-M08/SD		M8	8.5	12.0	17.0	8.4	17.0	10.0	10.0	34.0	125	~2.5 kg.	750	~15.0 kg.
SKP-S1/035-M10		M10	8.5	12.0	17.0	10.5	19.0	12.0	12.0	37.0	125	~2.7 kg.	750	~16.2 kg.
SKP-S1/035-M12		M12	8.5	12.0	17.0	13.0	21.0	13.0	13.0	38.0	125	~2.7 kg.	750	~16.2 kg.
SKP-S1/035-M16		M16	8.5	12.0	17.0	17.0	26.0	16.0	16.0	42.0	100	~2.9 kg.	600	~17.4 kg.
SKP-S1/050-M06	50	M6	10.0	14.0	19.0	6.5	20.0	10.0	10.0	37.0	80	~2.4 kg.	480	~14.4 kg.
SKP-S1/050-M08		M8	10.0	14.0	19.0	8.5	20.0	10.0	10.0	37.0	80	~2.3 kg.	480	~13.8 kg.
SKP-S1/050-M10/SD		M10	10.0	14.0	19.0	10.5	20.0	12.0	12.0	39.0	80	~2.5 kg.	480	~15.0 kg.
SKP-S1/050-M12		M12	10.0	14.0	19.0	13.0	23.0	13.0	13.0	43.0	80	~2.7 kg.	480	~16.2 kg.
SKP-S1/050-M14		M14	10.0	14.0	19.0	15.0	23.0	14.5	14.5	45.0	80	~2.7 kg.	480	~16.2 kg.
SKP-S1/050-M16		M16	10.0	14.0	19.0	17.0	28.0	16.0	16.0	46.0	80	~2.8 kg.	480	~16.8 kg.
SKP-S1/050-M20	M20	10.0	14.0	19.0	21.0	30.0	19.0	19.0	48.0	80	~2.7 kg.	480	~16.2 kg.	

Order Code	Cable Section (mm ²)	Bolt	Dimensions								Box Pcs.	Box Weight	Parcel Pcs.	Box Weight	
			d1	d4	a	d2	b	c1	c2	L					
SKP-S1/070-M06	70	M6	12,0	16,5	21,0	6,5	23,0	10,0	10,0	43,0	60	~2,8 kg.	360	~16,8 kg.	
SKP-S1/070-M08		M8	12,0	16,5	21,0	8,5	23,0	10,0	10,0	43,0	60	~2,7 kg.	360	~16,2 kg.	
SKP-S1/070-M10/SD		M10	12,0	16,5	21,0	10,5	23,0	12,0	12,0	44,0	60	~2,8 kg.	360	~16,8 kg.	
SKP-S1/070-M12		M12	12,0	16,5	21,0	13,0	23,0	13,0	13,0	46,0	60	~2,9 kg.	360	~17,4 kg.	
SKP-S1/070-M14		M14	12,0	16,5	21,0	15,0	23,0	14,5	14,5	48,0	60	~2,9 kg.	360	~17,4 kg.	
SKP-S1/070-M16		M16	12,0	16,5	21,0	17,0	28,0	16,0	16,0	50,0	50	~2,6 kg.	300	~15,6 kg.	
SKP-S1/070-M20		M20	12,0	16,5	21,0	21,0	30,0	19,0	19,0	53,0	50	~2,6 kg.	300	~15,6 kg.	
SKP-S1/095-M08	95	M8	13,5	18,0	25,0	8,5	26,0	12,0	12,0	48,0	50	~2,9 kg.	300	~17,4 kg.	
SKP-S1/095-M10		M10	13,5	18,0	25,0	10,5	26,0	12,0	12,0	48,0	50	~2,9 kg.	300	~17,4 kg.	
SKP-S1/095-M12/SD		M12	13,5	18,0	25,0	13,0	26,0	13,0	13,0	49,0	50	~2,8 kg.	300	~16,8 kg.	
SKP-S1/095-M14		M14	13,5	18,0	25,0	15,0	26,0	14,5	14,5	51,0	50	~2,9 kg.	300	~17,4 kg.	
SKP-S1/095-M16		M16	13,5	18,0	25,0	17,0	28,0	16,0	16,0	54,0	50	~3,0 kg.	300	~18,0 kg.	
SKP-S1/095-M20		M20	13,5	18,0	25,0	21,0	36,0	22,0	22,0	60,0	40	~2,8 kg.	240	~16,8 kg.	
SKP-S1/120-M08		120	M8	15,0	19,5	26,0	8,5	28,0	14,0	14,0	51,0	40	~2,7 kg.	240	~16,2 kg.
SKP-S1/120-M10	M10		15,0	19,5	26,0	10,5	28,0	14,0	14,0	51,0	40	~2,7 kg.	240	~16,2 kg.	
SKP-S1/120-M12/SD	M12		15,0	19,5	26,0	13,0	28,0	14,0	14,0	51,0	40	~2,6 kg.	240	~15,6 kg.	
SKP-S1/120-M14	M14		15,0	19,5	26,0	15,0	28,0	15,0	15,0	52,0	40	~2,6 kg.	240	~15,6 kg.	
SKP-S1/120-M16	M16		15,0	19,5	26,0	17,0	30,0	16,0	16,0	54,0	40	~2,7 kg.	240	~16,2 kg.	
SKP-S1/120-M20	M20		15,0	19,5	26,0	21,0	36,0	22,0	22,0	63,0	30	~2,4 kg.	180	~14,4 kg.	
SKP-S1/150-M08	150		M8	16,5	21,0	30,0	8,5	31,0	14,0	14,0	56,0	30	~2,4 kg.	180	~14,4 kg.
SKP-S1/150-M10		M10	16,5	21,0	30,0	10,5	31,0	14,0	14,0	56,0	30	~2,4 kg.	180	~14,4 kg.	
SKP-S1/150-M12/SD		M12	16,5	21,0	30,0	13,0	31,0	15,0	15,0	57,0	30	~2,4 kg.	180	~14,4 kg.	
SKP-S1/150-M14		M14	16,5	21,0	30,0	15,0	31,0	15,0	15,0	57,0	30	~2,4 kg.	180	~14,4 kg.	
SKP-S1/150-M16		M16	16,5	21,0	30,0	17,0	31,0	16,0	16,0	58,0	30	~2,3 kg.	180	~13,8 kg.	
SKP-S1/150-M20		M20	16,5	21,0	30,0	21,0	36,0	22,0	22,0	66,0	30	~2,7 kg.	180	~16,2 kg.	
SKP-S1/185-M10		185	M10	19,0	24,0	30,0	10,5	35,0	18,0	18,0	65,0	20	~2,5 kg.	120	~15,0 kg.
SKP-S1/185-M12	M12		19,0	24,0	30,0	13,0	35,0	18,0	18,0	65,0	20	~2,4 kg.	120	~14,4 kg.	
SKP-S1/185-M14	M14		19,0	24,0	30,0	15,0	35,0	18,0	18,0	65,0	20	~2,3 kg.	120	~13,8 kg.	
SKP-S1/185-M16/SD	M16		19,0	24,0	30,0	17,0	35,0	18,0	18,0	65,0	20	~2,3 kg.	120	~13,8 kg.	
SKP-S1/185-M20	M20		19,0	24,0	30,0	21,0	39,0	22,0	22,0	69,0	20	~2,4 kg.	120	~14,4 kg.	
SKP-S1/240-M10	240		M10	21,0	26,0	35,0	10,5	39,0	21,5	19,0	72,0	20	~3,0 kg.	120	~18,0 kg.
SKP-S1/240-M12			M12	21,0	26,0	35,0	13,0	39,0	21,5	19,0	72,0	20	~3,0 kg.	120	~18,0 kg.
SKP-S1/240-M14		M14	21,0	26,0	35,0	15,0	39,0	21,5	19,0	72,0	20	~3,0 kg.	120	~18,0 kg.	
SKP-S1/240-M16/SD		M16	21,0	26,0	35,0	17,0	39,0	21,5	19,0	72,0	20	~2,9 kg.	120	~17,4 kg.	
SKP-S1/240-M20		M20	21,0	26,0	35,0	21,0	39,0	21,5	19,0	72,0	20	~2,8 kg.	120	~16,8 kg.	
SKP-S1/300-M12		300	M12	23,5	29,5	44,0	13,0	43,0	24,0	24,0	87,0	8	~1,9 kg.	48	~11,4 kg.
SKP-S1/300-M14			M14	23,5	29,5	44,0	15,0	43,0	24,0	24,0	87,0	8	~1,9 kg.	48	~11,4 kg.
SKP-S1/300-M16	M16		23,5	29,5	44,0	17,0	43,0	24,0	24,0	87,0	8	~1,9 kg.	48	~11,4 kg.	
SKP-S1/300-M20/SD	M20		23,5	29,5	44,0	21,0	43,0	24,0	24,0	87,0	8	~1,9 kg.	48	~11,4 kg.	
SKP-S1/400-M12	400		M12	27,0	34,0	44,0	13,0	49,0	24,0	24,0	90,0	6	~2,0 kg.	36	~12,0 kg.
SKP-S1/400-M14			M14	27,0	34,0	44,0	15,0	49,0	24,0	24,0	90,0	6	~2,0 kg.	36	~12,0 kg.
SKP-S1/400-M16			M16	27,0	34,0	44,0	17,0	49,0	24,0	24,0	90,0	6	~2,0 kg.	36	~12,0 kg.
SKP-S1/400-M20/SD		M20	27,0	34,0	44,0	21,0	49,0	24,0	24,0	90,0	6	~1,9 kg.	36	~11,4 kg.	

SKP-S1 SPECIFICATIONS

MATERIAL	ELECTROLYTIC COPPER CONFORMED TO EN 13800
COATING	TIN PLATED
JOINT	CLAMP COUPLING
THICKNESS	VERY THICK
CABLE ENTRY	STANDARD

THE CABLE LUGS WHICH ARE INDICATED IN BOLD FONT, ARE STANDARD PRODUCTS OF **Simpa**

